High performing column level indicators

Set screw
and oil circulation.



Tube in Pyrex
(ESG safety glass) resistant to
glycol-based solutions.

Maximum continuous working
temperature 130 °C
with peaks at 160 °C
and pressure of 5/6 bar.

Contrast screen
with level indications.

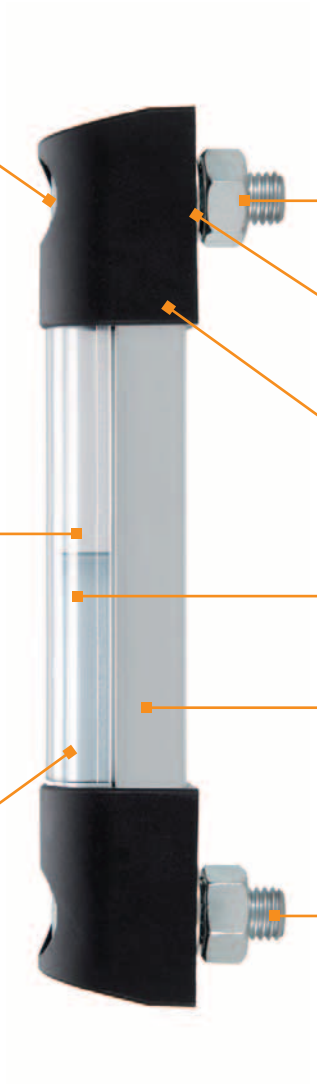

Zinc-plated or stainless steel
screws and nuts.

FKM type VITON®*
synthetic rubber
or NBR rubber O-Ring.

**Registered trademark by DuPont Dow Elastomers.*

Technopolymer
assembly ends.

Polycarbonate protection
(against accidental shocks).

Aluminium support
with side visibility.

Hole centre distance for
fixing up to 1500 mm.

ELESA models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.